



Flicker Free



Static White, Dynamic White, RGB+W



Warm Dimming



Easy Installation



Custom Lengths



Dim To Dark

Features

OUTPUT

- **Standard Output:** 7W per foot 720 Lumens per foot
- **High Output:** 8W per foot / 960 Lumens per foot
- **Ultra Output:** 10W per foot / 1200 Lumens per foot.
- **Dynamic White** - 2700K-6500K

MATERIALS

- Extruded aluminum cove framing system
- Extruded aluminum LED gear trays

FINISH

- Powder coat white standard
- Other RAL color options available please consult factory

REFLECTOR

92% reflective white finish, die-formed steel

OPTICS

Sateen film diffuser

DRIVER

Integral 120-277v Eldo driver with standard 0-10V dimming to 1%


OPTIONS

90° inside and outside corner kits available

CERTIFICATIONS


UL Listed, IBEW (local 3) Union-Made in the USA

Technical Drawings

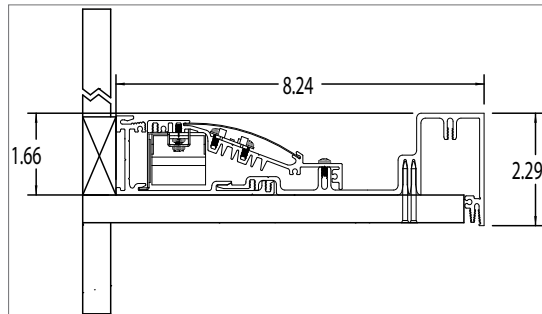

Photometrics

power 48 watts
lumens 4453 lm
efficacy 93.2 lm/W

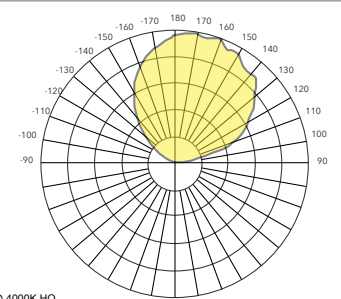

*photometric data shown for 4' fixture @ 4000K HO

ORDERING INFORMATION GHO

FRAMING	CASE LENGTH	OPTIONS
GHO - Ghost Cove Knife Edge	8 - 8ft	ICK - Inside Corner Kit
	RUN - Specify	OCC - Outside Corner Kit
	*field cuttable come in 8' lengths	CCK - Custom Corner Kit
		SFD - Sateen Lens
		CDC - Clear Dust Cover

Sample Number: _____



ORDERING INFORMATION GGT

GEAR TRAY	COLOR	OUTPUT	LENGTH	DIMMING & CONTROL
GGT - Ghost	27 - 2700K	ST - Standard Output	2 - 23 1/8"	STD - Standard 0-10V Eldo LED driver
	30 - 3000K	HO - High Output	3 - 33 3/4"	DA - DALI Dimming
	35 - 3500K	UL - Ultra Output	4 - 44 1/4"	DMX - Tunable White
	40 - 4000K		6 - 66 1/2"	D10 - Dual 0-10V Tunable
	50 - 5000K		8 - 88 3/4"	AW-Lutron Athena Wireless
	57 - 5700K			
	65 - 6500K			
	DW - Dynamic White			



Sample Number: _____

