



Per Inch



Static White, Dynamic White, RGB+W



SunLIKE LED Option



Easy Installation



Custom Transitions



Dim To Dark

Features

OUTPUT

- **Standard Output:** 8W per foot 800 Lumens per foot
- **High Output:** 10W per foot / 1000 Lumens per foot
- **Low Output:** 3W per foot / 250 Lumens
- **Dynamic White** - 2700K-6500K

MATERIALS

- Extruded aluminum cove framing system
- Extruded aluminum LED gear trays

FINISH

- Powder coat white standard
- Other RAL color options available please consult factory

REFLECTOR

Matte white finished aluminum

OPTICS

Optional sateen film diffuser or dust cover

DRIVER

Integral 120-277v Eldo driver with standard 0-10V dimming to 1%


OPTIONS

90° inside and outside corner kits available

CERTIFICATIONS


UL Listed, IBEW (local 3) Union-Made in the USA

Technical Drawings

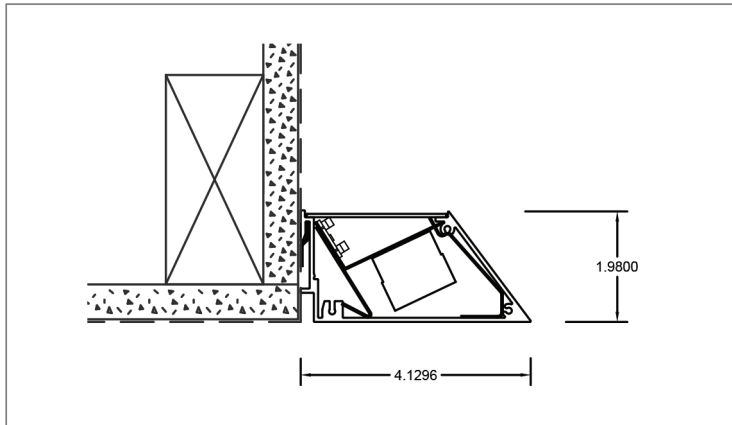

Photometrics

power 47 watts
lumens 4440 lm
efficacy 94.4 lm/W

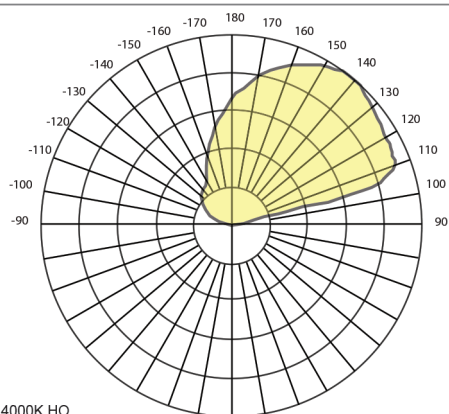

*photometric data shown for 4' fixture @ 4000K HO



ORDERING INFORMATION MGHO

FRAMING	CASE LENGTH	OPTIONS
MGHO - Mini-Ghost Cove	8 - 8ft	ICK - Inside Corner Kit
	RUN - Specify	OCK - Outside Corner Kit
	*field cuttable come in 8' lengths	CCK - Custom Corner Kit
		SFD - Sateen Lens
		CDC - Clear Dust Cover



ORDERING INFORMATION MGT

GEAR TRAY	COLOR	OUTPUT	LENGTH	CONTROL
MGT - Mini-Ghost	27 - 2700K	LO - Low Output	2 - 23 1/8"	STD - Standard 0-10V Eldo LED driver
	30 - 3000K	ST - Standard Output	3 - 33 3/4"	DA - DALI Dimming
	35 - 3500K	HO - High Output	4 - 44 1/4"	DMX - Tunable White
	40 - 4000K	UL - Ultra Output	6 - 66 1/2"	D10 - Dual 0-10V Tunable
	50 - 5000K		8 - 88 3/4"	
	57 - 5700K			
	65 - 6500K			
	DW - Dynamic White			



Sample Number: MGHO-24-SFD-MGT-35-ST-8-DA

