



Flicker Free



Static White, Dynamic White, RGB+W



Warm Dimming



Easy Installation



Custom Lengths



Dim To Dark

## Features

### OUTPUT

- **Standard Output:** 7W per foot 720 Lumens per foot
- **High Output:** 8W per foot / 960 Lumens per foot
- **Ultra Output:** 10W per foot / 1200 Lumens per foot.
- **Dynamic White** - 2700K-6500K

### MATERIALS

- Extruded aluminum cove framing system
- Extruded aluminum LED gear trays

### FINISH

- Powder coat white standard
- Other RAL color options available please consult factory

### REFLECTOR

92% reflective white finish, die-formed steel

### OPTICS

Sateen film diffuser

### DRIVER

Integral 120-277v Eldo driver with standard 0-10V dimming to 1%


### OPTIONS

90° inside and outside corner kits available

### CERTIFICATIONS


UL Listed, IBEW (local 3) Union-Made in the USA

## Technical Drawings

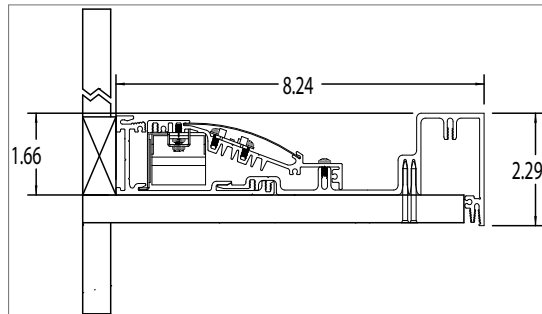

## Photometrics

power 48 watts  
lumens 4453 lm  
efficacy 93.2 lm/W

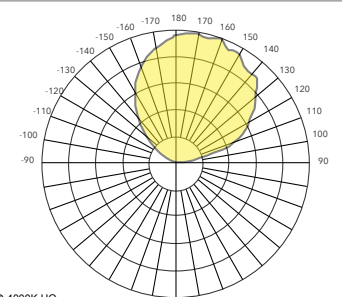

\*photometric data shown for 4' fixture @ 4000K HO

## ORDERING INFORMATION GHO

FRAMING	CASE LENGTH	OPTIONS
GHO - Ghost Cove Knife Edge	8 - 8ft	ICK - Inside Corner Kit
	RUN - Specify	OCC - Outside Corner Kit
	*field cuttable come in 8' lengths	CCK - Custom Corner Kit
		SFD - Sateen Lens
		CDC - Clear Dust Cover

Sample Number: \_\_\_\_\_



**ORDERING INFORMATION GGT**

GEAR TRAY	COLOR	OUTPUT	LENGTH	CONTROL
GGT - Ghost	27 - 2700K	ST - Standard Output	2 - 23 1/8"	STD - Standard 0-10V Eldo LED driver
	30 - 3000K	HO - High Output	3 - 33 3/4"	DA - DALI Dimming
	35 - 3500K	UL - Ultra Output	4 - 44 1/4"	DMX - Tunable White
	40 - 4000K		6 - 66 1/2"	D10 - Dual 0-10V Tunable
	50 - 5000K		8 - 88 3/4"	
	57 - 5700K			
	65 - 6500K			
	DW - Dynamic White			



Sample Number: \_\_\_\_\_

